
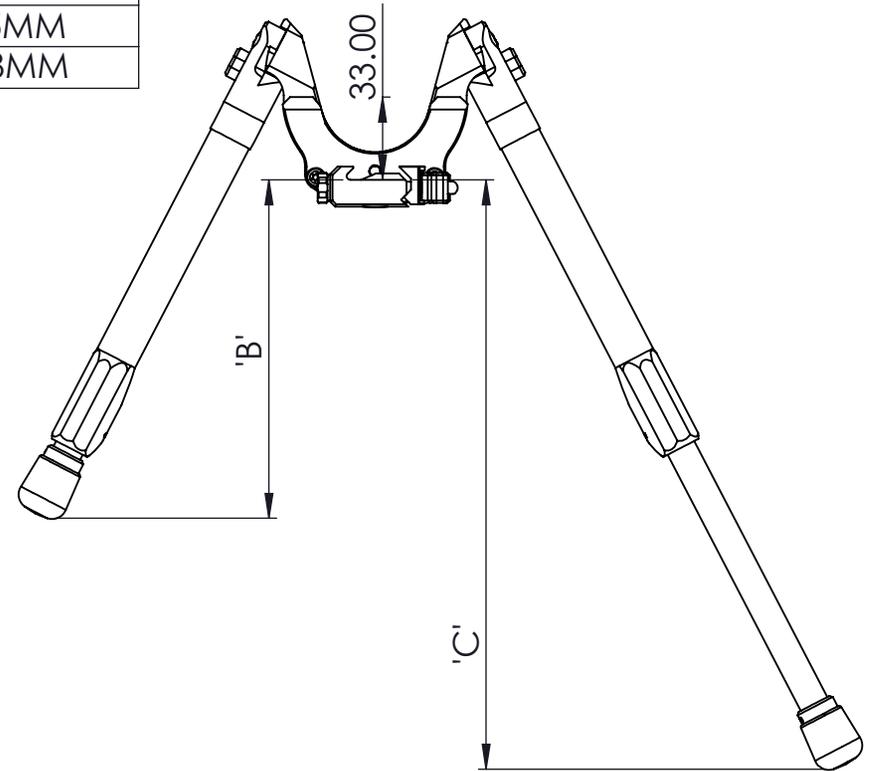


2

1

BIPOD TYPE	DIM 'A'	DIM 'B'	DIM 'C'
180MM	190MM	90MM	145MM
230MM	240MM	135MM	238MM

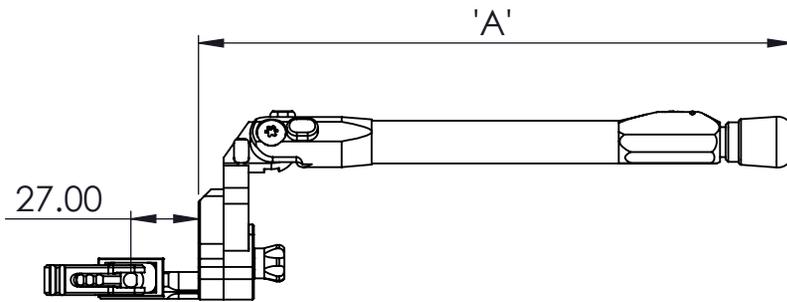

NOTE: BIPOD MUST BE LOCATED AT EXTREME FOREND OF RIFLE TO ALLOW ROTATION AROUND BARREL AXIS

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN MM
TOLERANCES:
FRACTIONAL ±
ANGULAR: MACH ± BEND ±
TWO PLACE DECIMAL ±
THREE PLACE DECIMAL ±

INTERPRET GEOMETRIC TOLERANCING PER:

MATERIAL **VARIOUS**

FINISH

DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	CC	15/04/20
CHECKED		
ENG APPR.		
MFG APPR.		
Q.A.		
COMMENTS:		

ALL DIMENSIONS ARE APPROXIMATE

WWW.TIER-ONE.EU

TITLE:

EVOLUTION BIPOD SPECIFICATIONS

SIZE DWG. NO. REV

A **T1-EVO SPECS**

SCALE: 1:5 WEIGHT: SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF EVO LEISURE LTD. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF EVO LEISURE LTD IS PROHIBITED.

 TRADING NAME OF EVO LEISURE LTD GREAT BRITAIN	
NEXT ASSY	USED ON
APPLICATION	

2

1